


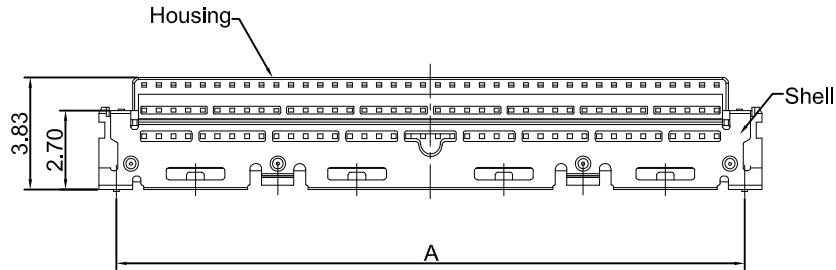


# DRAWING FOR CUSTOMER




■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:250V AC/minute
- Contact Resistance:50mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-40℃~+85℃

■Material:

- Insulator:LCP UL94V-0,Black
- Contact Pin: Phosper Bronze  
Finish:Gold-plated,over Nickel
- Shell:Phosper Bronze  
Finish:Gold-plated,over Nickel

KB501-XXH5A

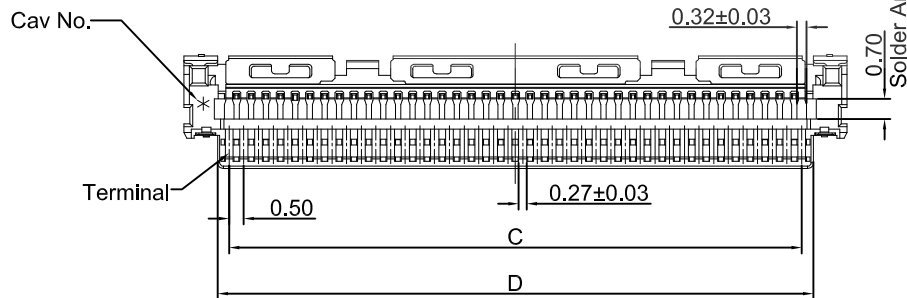

Poles	A	B	C	D
30	16.50	17.58	14.50	15.30
40	21.40	22.58	19.50	20.30

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期		VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB501-XXH5A
2014-02-21		A		KB501-XXH5A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
							APPROVED 核准	William	DWG NO. 圖號
									PE201210A

UNIT 單位	mm	PRODUCT NAME 產品名稱	20454 PH0.50mm XXP Wire To Board Connector