DRAWING FOR CUSTOMER

KB9501 - 30 H G 2 A - T X

- Pin NO.
- Housing
- Color: B:Black G:Green L:Blue
- Mold No.
- Version
- Point
- Logo

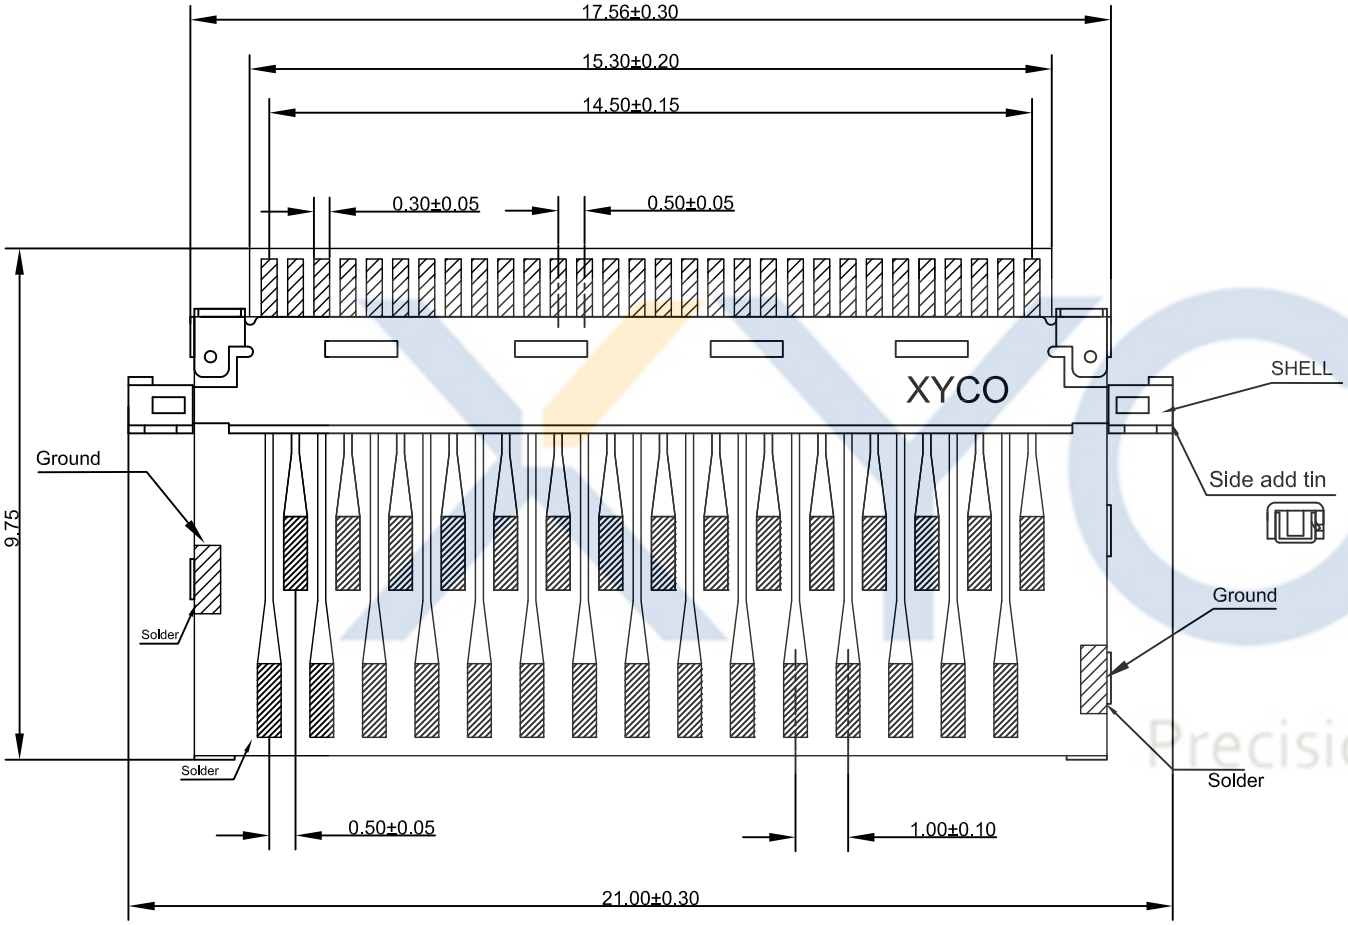

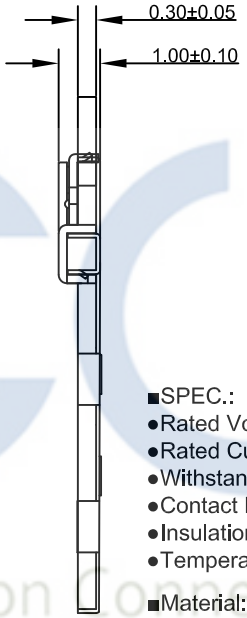

■SPEC.:
- ●Rated Voltage: 100V AC,DC
- ●Rated Current: 1A AC,DC
- ●Withstand Voltage: 250V AC/minute
- ●Contact Resistance: 50mΩ max
- ●Insulation Resistance: 1000MΩ min
- ●Temperature Range: -25°C~+85°C

■Material:
- ●1.Insulator: PCB
- ●2.Contact Pin: Pure copper
  finish: 1.Gold 1u" plated over Nickel.
- ●3. Shell material & finish.
  KB99101-30S1B:Phosphor bronze,
  finish:Gold plated over nickel
  KB99102-30S1B:Brass, Gold plated over nickel
  finish:Gold plated over nickel

Precision Connectors

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-05-08	A		KB9501-30HG2A-TX	Devin

TOLERANCE 公 差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas
	APPROVED 核准	William

KB9501-30HG2A-TX	
PART NO. 料號	
DWG NO. 圖號	PE1508001A

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

UNIT 單位	mm	PRODUCT NAME 產品名稱	20454 PH0.5mm 30P Green 双排焊盘