
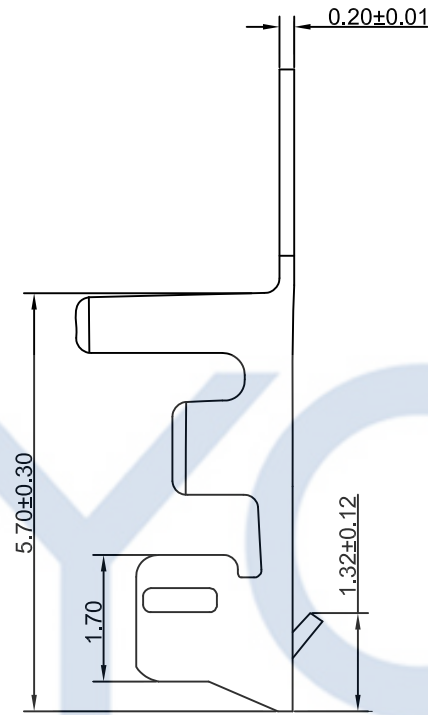


# DRAWING FOR CUSTOMER

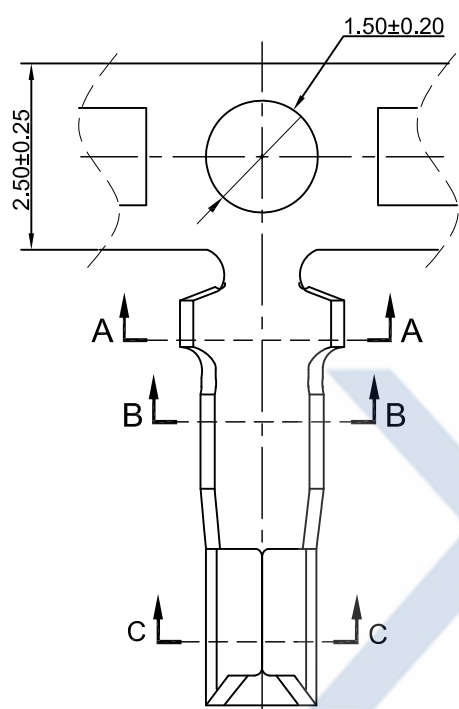

■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:2A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Terminal:

- Material:Phosphor Bronze C5191
- Finish:Tin-plated ;over Nickel
- Applicable Wire: AWG#24~28
- QTY.:10KPCS/Reel

KB933-X X T 4 A

- 1:All plated
- 2:Half plated


Plating

- 0: Tin-plat
- 1: Gold Plat1u"
- 2: Gold Plat3u"
- 3: Gold Plat5u"


Version

Mold No.


Terminal



Section C-C



Section B-B



Section A-A

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-11-30		A	CHANGE HISTORY 變更歷史	KB933-XXT4A	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB933-XXT4A		UNIT 單位		PRODUCT NAME 產品名稱	PHR PH2.0mm Wire To Board Termianl
DATE 日期	VER 版本	CHANGED NAME 修改後料號				DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	mm			
							APPROVED 核准	William	DWG NO. 圖號	PE1705008A	mm			